

# NOVAMELT® A 2179

## Product description

Hotmelt adhesive with excellent adhesion to various substrates. Recommended for slot die or roller coater.

## Suggested use

Lamination of paper/paper, PE/PET-films, and paper/aluminum combinations. Suggested coating temperature 150 – 160 °C.

## FDA-Status

Meets composition requirements of indirect food additives regulation FDA 21-CFR-175.105 „Adhesives“.


## Physical properties

Softening point (ASTM D36): approx. 152 °C

Open time (Novamelt Method): > 3 min (coatweight 15 g/m<sup>2</sup>, application temperature 160 °C)

Color: white / ivory

Viscosity (D= 92.7 s<sup>-1</sup>; Anton Paar MCR 300):

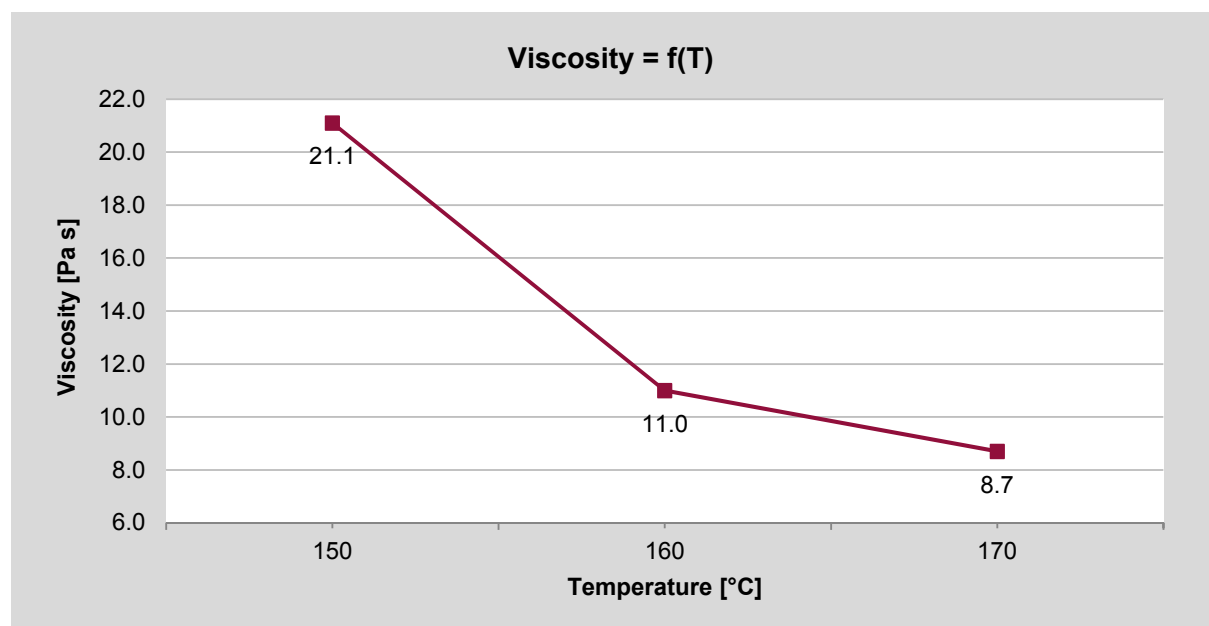

## Packaging

4 kg, 8 kg and 20.8 kg blocks in siliconized boxes, 165 kg fibre drums

## Shelf life and storage

The product can be stored two years – starting from production date – in its original package under clean and dry conditions and protected from direct sunlight. Average storing temperature is suggested to be 25 °C or below. Storage temperature should not exceed 40 °C.

v1.2\_09/11\_DS (replaces all previous versions)

Novamelt GmbH, Öflinger Straße 120, D-79664 Wehr  
T +49 7762 70 85-0, F +49 7762 70 85-48, E [info@novamelt.de](mailto:info@novamelt.de), I [www.novamelt.de](http://www.novamelt.de)

1/1

The information presented in this leaflet is based on our present level of technical knowledge and experience and reflects averages. Due to the abundance of possible influences during the use and application of our products this information does not relieve the user of conducting his own tests and experiments. No legally binding guarantee of certain features or of the suitability for any particular purpose can be deduced from it. Possible patent rights and existing laws and regulations must be observed by the user as his own responsibility. Technical modifications reserved.

Certified: DIN EN ISO 9001:2008